

Device Configuration Guide

VoIP Phone KE1021A



All Rights Reserved

Copyright © 2005

The use, disclosure, modification, transfer, or transmittal of this work for any purpose, in any form, or by any means, without the written permission of the copyright holder, is strictly forbidden.

*VoiceDirector Device Configuration Guide
VoIP Phone KE1021A*

Disclaimer

The content of this manual is subject to change without notice and should not be construed as a commitment by the manufacturer, distributor, or service provider. This manual is furnished for informational use only and the manufacturer, distributor, or service provider assumes no responsibility for any errors or inaccuracies that may appear herein.

Any services provided through this equipment are not intended to replace or be a substitute for primary line voice services or Plain Old Telephone Service ("POTS") and are not meant to provide guaranteed Automatic Number Identification or Automatic Location Information capabilities associated with 911 or E911 services or to permit access to 411 directory assistance services. The manufacturer, distributor, or service provider will not be liable for any damages, expenses, liabilities, risks, or harms arising out of or related to the services provided through this equipment.

04.24.2006

Table of Contents

STEP 1 – SET UP THE ACCOUNT	1
STEP 2 - LOGGING INTO THE WEB CONFIGURATION INTERFACE	1
STEP 3 – CONFIGURING THE SIP PROXY SETTINGS.....	1

1. VoIP Phone (KE1021A)

STEP 1 – SET UP THE ACCOUNT

Make sure you have an account on the VoiceDirector server to which you are connecting.


STEP 2 - LOGGING INTO THE WEB CONFIGURATION INTERFACE

To log into the phone's Web Configuration Interface:

1. Press the **Hold** key on the VoIP Phone.
The phone displays and announces the IP address.
2. Write down that IP address.
3. Launch Microsoft® Internet Explorer.
4. In the **Address** bar, enter **http://**, followed by the IP address you wrote down in step 3 above.

For example, if your IP address is 192.168.1.100, you would enter:
http://192.168.1.100 in the **Address** bar.

5. Press the **Enter** key on your keyboard, or click the **Go** button.
A Login screen displays.

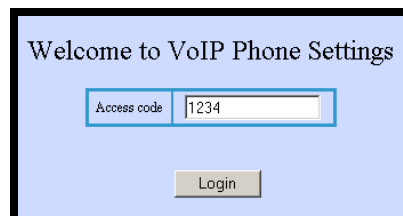

VoIP Phone Login Screen

6. Click in the **Access Code** field, and enter **1234**, and then click the **Login** button.
You are now logged into the phone's Web Configuration Interface. See the screen on the next page.

STEP 3 – CONFIGURING THE SIP PROXY SETTINGS

In order to use the VoiceDirector service, you must have a VoiceDirector account number and authentication password. If you do not have this information, please contact your System Administrator.

To enter the account number and password:

1. In the **SIP server** field of the Web Configuration Interface page, enter your VoiceDirector IP Address.
2. In the **phone number** field, enter your VoiceDirector SIP Username.
3. In the **account** field, enter your VoiceDirector SIP Username.

4. In the **pin** field, enter your VoiceDirector SIP password.
5. Keep the default values for all other fields.

VoIP Phone Settings					
Network Settings					
iptype	dhcp	ppp id		ppp password	
local ip	0.0.0.0	subnet mask	0.0.0.0	gateway ip	0.0.0.0
dns	0.0.0.0	dns2	0.0.0.0	mac	12-34-56-78-90-AB
Account Settings					
SIP server	<VoiceDirector Address>	SIP port	5060		
phone number	<SIP Username>	account	<SIP Username>	pin	<SIP Password>
Phone Settings					
use dialplan	disable	dial number		LCD menu lock	<input type="checkbox"/>
ring type	pcmring	handset out volume	16	ringing/speaker volume	16
Bandwidth Settings for Call Quality					
preferred codec	g723	bandwidth	low bandwidth	backup codec1	g729
				backup codec2	g711
Other Settings					
access code	basic	firmware upgrade server	keprov.net2phone.com	use daylight savings	<input type="checkbox"/>
sntp ip	216.53.3.44			timezone	(GMT-05:00)Eastern Time(U.S. & Canada)
<input type="button" value="Save Settings"/> <input type="button" value="Edit Phone Book"/> <input type="button" value="Update Firmware"/> <input type="button" value="Restore Defaults"/>					

VoIP Phone Configuration Page

6. Click the **Save settings** button.
The values are saved, and the browser page displays the message, "Update Successful!" The phone will then reboot automatically.
7. Once the phone restarts, close the browser window.



NOTE: When you click the Submit or Save Settings buttons, you must wait for the browser to refresh before continuing.

Congratulations! You are now ready to start enjoying VoiceDirector's superior quality on your VoIP IP phone.